

PowerBit™ F10-0

10 – 12.5 Gb/s Intensity Modulator with Low Drive Voltage

Features:

- Very Low Drive Voltage
- Standard "F"-type footprint for 4" MSA
- C and L-Band Operation
- Enhanced E/O Bandwidth for up to 12.5 Gb/s Modulation Speed
- Low Insertion Loss
- High Extinction Ratio
- Integrated Monitor Photodiode
- Available with Fixed Chirp

Applications:

- External Intensity Modulation from 10 Gb/s to 12.5 Gb/s NRZ and Electrical RZ
- SDH/SONET-DWDM Systems
- Long Reach 10 Gb/s MSA Transponders




Oclaro intensity modulators are based on the Mach-Zehnder Interferometer architecture. They are manufactured using the highly reliable Titanium indiffusion technology in x-cut, y-propagating Lithium Niobate substrates. This 10 Gb/s - 12.5 Gb/s Modulator is designed for high bit rate advanced Metro to Long Haul communication systems that requires the superior performance of x-cut Lithium Niobate. Exceptionally low drive voltage enables low power consumption reducing the overall transmitter cost.


A small footprint and low profile makes the modulator compatible with the 10 Gb/s MSA Transponder standard. A single Tx board design can accommodate either the zero-chirp or the fixed chirp modulator version. Suitable driver amplifiers are available through Oclaro recommended partners.

Performance Characteristics


Electro Optical Response

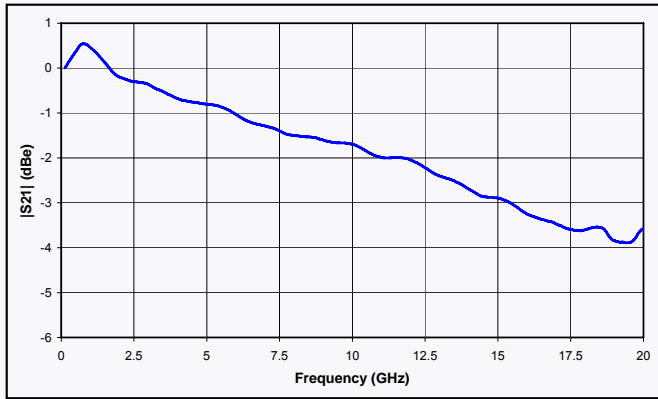

Electrical Return Loss

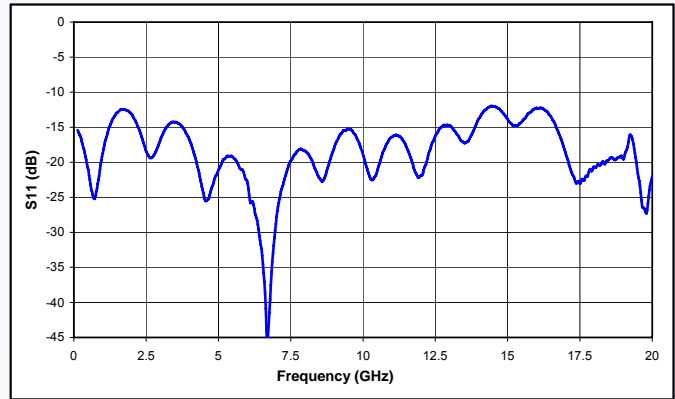

Eye Diagram

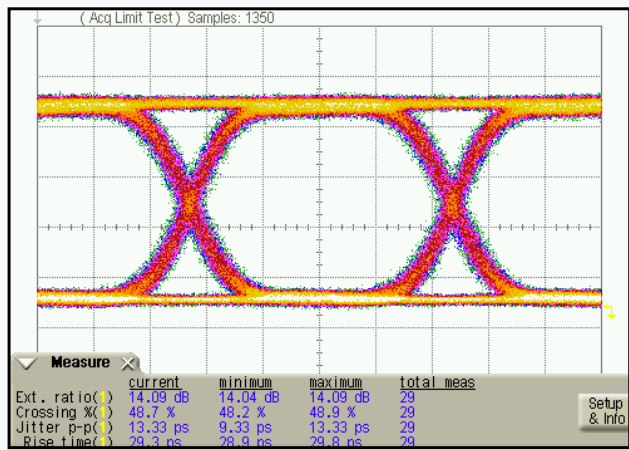

Absolute Maximum Ratings

Parameter	Conditions	Min	Max	Unit
Maximum Input Power (Electrical)	RF-Port / AC Coupled		25	dBm
Maximum Input Power (Optical)	CW		100	mW
Maximum Operating Temperature Variation Rate			1	°C/min
Storage Temperature Range		-40	+85	°C
Operating Temperature Range		0	+70	°C

Specifications

Parameters		Units
Optical		
Operating Wavelength Range	C and L-Band	
Insertion Loss	3.5	dB
Extinction Ratio (DC)	≥ 20	dB
Chirp (Fixed chirp version)	See PowerBit™ F10-Z Data Sheet	
Optical Return Loss (without connectors)	≥ 45	dB
Electrical		
S ₂₁ Electro Optical Bandwidth (-3 dB)	12.5	GHz
S ₁₁ Electrical Return Loss	≤ -10	dB
RF V _{π} Voltage (@ 1 kHz)	3.8	V
Bias V _{π} Voltage (@ 1 kHz)	5.0	V
PRBS Electrical Drive Voltage (V _{amp})	4	V
Dynamic Extinction Ratio	14	dB
Photodiode Responsivity (referred to output power)	$\geq 10^{-3}$	A/W
Linearity	$\pm 10\%$	


- Where not specified, parameters are measured at 25 °C.
- Values are "typical", unless otherwise indicated.

Pin-Out and Fiber Specifications

RF Connector	GPO
Bias and PD Connector	Lead Pins
Input Fiber	Corning/Fujikura SM15P UV/UV400
Output Fiber	Corning SMF-28™ 1

Note 1. Other output fibers available upon request.

Package Footprint

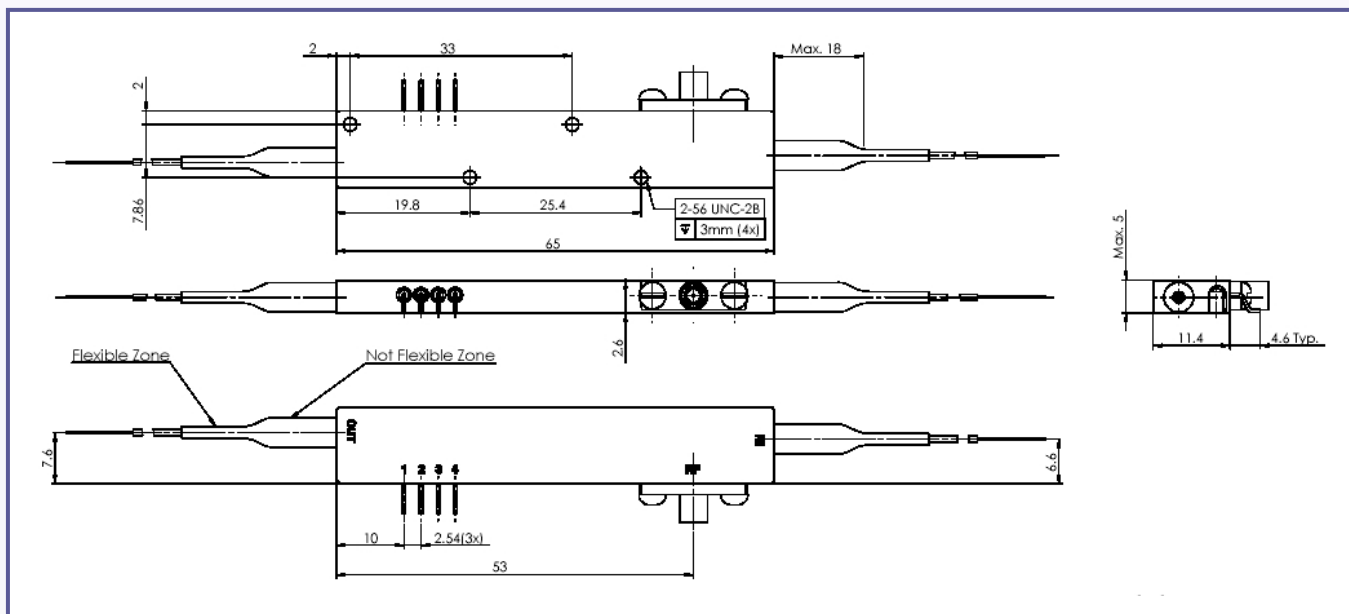

Pin #	Sym	Description
1	PD	Photodiode Cathode
2	PD	Photodiode Anode
3	B	Bias
4	G	Ground
5	RF	RF Input (GPO Male)



Ordering Information

Part Number	
0-chirp	F10-0-13P-Px-yyzz-01
Pre-chirped	See dedicated data sheets or ask for further information

yy; zz	Input; Output Connectors	NC = No Connectors FP = FC/PC FA =FC/APC SP =SC/PC SA = SC/APC	Other connector s available upon request; all connectors on PM fiber are polarization maintaining
x	Output fiber	S = SMF, P= PMF	

Contact Information

Oclaro Inc.
Worldwide Headquarters
 2584 Junction Avenue
 San Jose
 CA 95134
 USA

Tel: +1 408 383 1400
 Fax: +1 408 919 1501

www.oclaro.com
Americas@oclaro.com

Important Notice

Performance figures, data and any illustrative material provided in this data sheet are typical and must be specifically confirmed in writing by Oclaro before they become applicable to any particular order or contract. In accordance with the Oclaro policy of continuous improvement specifications may change without notice. The publication of information in this data sheet does not imply freedom from patent or other protective rights of Oclaro or others. Further details are available from any Oclaro sales representative.

D2601 PowerBit F10 Version 1.1 September 2009
 ©Oclaro 2009. Oclaro the Oclaro, Inc. logo, and all other Oclaro, Inc product names and slogans are trademarks or registered trademarks of Oclaro, Inc. in the U.S.A. or other countries. Products described in this datasheet may be covered by one or more patents in the U.S.A. and abroad. Information in this datasheet is subject to change without notice.